


Description:	Carbon steel self-drilling screw with wings for fibre cement corrugated sheets on wood substructure
Size:	6,5 mm x 105 mm / 130 mm / 180 mm
Drill capacity:	Wood minimum 52mm
Drill point:	Reduced drill point especially for wood
Material:	Carbon steel C1022
Durability coating:	Hot Dip galvanized, 450 g/m ²
Head style:	5/16" indented hexagon washer head / 8 mm across flats
Head mark:	"ET – CS" marking
Recommended drill speed:	1.000 – 1.800 rpm
Sealing:	Ø 25 mm injected mould BAZ element, 70° - 75° Shore hardness, with Ø 22 mm washer stainless steel A2

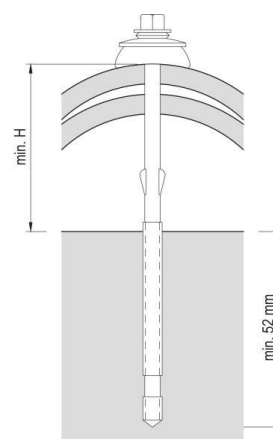

Carbon steel screw for wood substructure			
Drill point for wood			
Total length	105 mm	130 mm	180 mm
min. H	42,6 mm	50,6 mm	100,6 mm
min. penetration wood	52 mm	52 mm	52 mm
Pull out value	4,90 kN penetration depth 50mm		
Pull over value	2,68 kN penetration depth 50mm		

Tests executed by CSTB
Reference: 26076486 – DSSF/MRF – 2018.0507
Tested on wood substructure